

# 60

## AGE series

60X60X10mm

### ●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
- Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB
- Weight / 37g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
- 葉：塑膠(94V-0)
- 軸承 / 滾珠軸承 FMB
- 重量 / 37克



### ●Specification / 詳細規格 \* 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow	Max. Static Pressure	Sound	P-Q		
機型	軸承	電壓	操作電壓	電流	轉速	最大風量	最大風壓	噪音	P-Q曲線		
P/N	B / S / F	V	V	A	RPM	m <sup>3</sup> /min	CFM	Pa	In-H <sub>2</sub> O	dBA	No.
AGE06010_05L	B / F	5	4.5~5.5	0.30	3500	0.56	14.3	20.4	0.08	28	①
AGE06010_05M	B / F	5	4.5~5.5	0.38	4200	0.67	17.1	29.4	0.12	33	②
AGE06010_05H	B / F	5	4.5~5.5	0.42	4900	0.78	19.9	40.1	0.16	37	③
AGE06010_12L	B / F	12	7.0~13.2	0.14	3500	0.56	14.3	20.4	0.08	28	①
AGE06010_12M	B / F	12	7.0~13.2	0.17	4200	0.67	17.1	29.4	0.12	33	②
AGE06010_12U	B / F	12	7.0~13.2	0.20	4900	0.78	19.9	40.1	0.16	37	③
AGE06010_24L	B / F	24	14.0~26.4	0.05	3500	0.56	14.3	20.4	0.08	28	①
AGE06010_24M	B / F	24	14.0~26.4	0.08	4200	0.67	17.1	29.4	0.12	33	②
AGE06010_24H	B / F	24	14.0~26.4	0.10	4900	0.78	19.9	40.1	0.16	37	③

### ● Drawing & panel out-cuts/ 圖面及出入風口

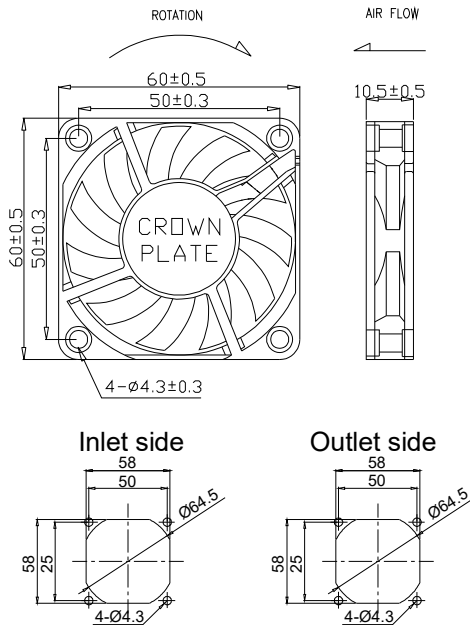

### ● Characteristic Curves/ 特性曲線

