


120 AGF series

120X120X38mm

●General Specification / 一般規格

- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
- Impeller : plastic(94V-0)
- Bearing / Ball bearing
- Weight / 320g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：鋁合金壓鑄
- 葉：塑膠(94V-0)
- 軸承 / 滾珠軸承
- 重量 / 320克

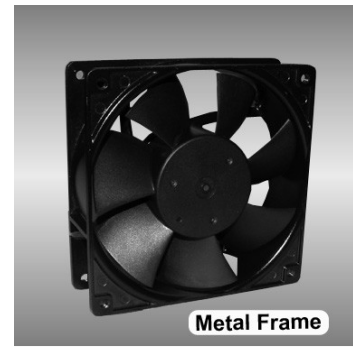

Metal Frame



●Specification / 詳細規格 * 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

| Model | Bearing | Voltage | Operating Vol. | Current | Speed | Max. Air Flow | | Max. Static Pressure | | Sound | P-Q |
|--------------|-----------|---------|----------------|---------|-------|---------------------|-------|----------------------|---------------------|-------|-------|
| 機型 | 軸承 | 電壓 | 操作電壓 | 電流 | 轉速 | 最大風量 | | 最大風壓 | | 噪音 | P-Q曲線 |
| P/N | B / S / F | V | V | A | RPM | m ³ /min | CFM | Pa | In-H ₂ O | dBA | No. |
| AGF12038_12L | B | 12 | 7.0~13.2 | 0.40 | 2600 | 3.25 | 114.7 | 102.1 | 0.41 | 41 | ② |
| AGF12038_12M | B | 12 | 7.0~13.2 | 0.50 | 2900 | 3.49 | 123.2 | 112.1 | 0.45 | 44 | ③ |
| AGF12038_12H | B | 12 | 7.0~13.2 | 0.80 | 3200 | 3.85 | 135.9 | 134.5 | 0.54 | 48 | ④ |
| AGF12038_12U | B | 12 | 7.0~13.2 | 1.60 | 4200 | 5.05 | 178.4 | 234.1 | 0.94 | 54 | ⑤ |
| AGF12038_24J | B | 24 | 14.0~26.4 | 0.18 | 2300 | 2.87 | 101.4 | 79.7 | 0.32 | 38 | ① |
| AGF12038_24L | B | 24 | 14.0~26.4 | 0.25 | 2600 | 3.25 | 114.7 | 102.1 | 0.41 | 41 | ② |
| AGF12038_24M | B | 24 | 14.0~26.4 | 0.40 | 2900 | 3.49 | 123.2 | 112.1 | 0.45 | 44 | ③ |
| AGF12038_24H | B | 24 | 14.0~26.4 | 0.46 | 3200 | 3.85 | 135.9 | 134.5 | 0.54 | 48 | ④ |
| AGF12038_24U | B | 24 | 14.0~26.4 | 0.80 | 4200 | 5.05 | 178.4 | 234.1 | 0.94 | 54 | ⑤ |
| AGF12038_48J | B | 48 | 28.0~56.0 | 0.09 | 2300 | 2.87 | 101.4 | 79.7 | 0.32 | 38 | ① |
| AGF12038_48L | B | 48 | 28.0~56.0 | 0.18 | 2600 | 3.25 | 114.7 | 102.1 | 0.41 | 41 | ② |
| AGF12038_48M | B | 48 | 28.0~56.0 | 0.20 | 2900 | 3.49 | 123.2 | 112.1 | 0.45 | 44 | ③ |
| AGF12038_48H | B | 48 | 28.0~56.0 | 0.30 | 3200 | 3.85 | 135.9 | 134.5 | 0.54 | 48 | ④ |
| AGF12038_48U | B | 48 | 28.0~56.0 | 0.53 | 4200 | 5.05 | 178.4 | 234.1 | 0.94 | 54 | ⑤ |

● Drawing & panel out-cuts/ 圖面及出入風口

● Characteristic Curves/ 特性曲線

