

60

DC Cross Flow Fan

CF Series






● General Specification / 一般規格

- Motor 馬達 DC single/three phase brushless motor 直流 / 三相無刷單相馬達
- Material 材質 Frame: Steel / Impeller: Al alloy 外框: 鋼鐵 / 扇葉: 鋁合金

● Performance Specification / 性能規格

| Model 型號 | Size/尺寸 | | | Voltage 電壓 | Current 電流 | Speed 轉速 | Max. Air Flow 最大風量 | | Max. Static Pressure 最大靜壓 | | Noise 噪音 | P-Q Curve P-Q 線 |
|--------------|---------|-----|-----|---------------|---------------|-------------|-----------------------|-------|------------------------------|---------------------|-------------|--------------------|
| | A | B | C | | | | m ³ /h | CFM | Pa | In-H ₂ O | | |
| No. | mm | | | V | A | RPM | | | | | dBA | No. |
| CFD60120B12M | 186 | 138 | 123 | 12 | 0.74 | 2600 | 102 | 60.0 | 49 | 0.197 | 44 | ① |
| CFD60120B24M | | | | 24 | 0.35 | 2600 | 102 | 60.0 | 49 | 0.197 | 44 | ① |
| CFD60190B12M | 246 | 199 | 184 | 12 | 1.00 | 2400 | 139 | 81.8 | 45 | 0.181 | 44 | ② |
| CFD60190B24M | | | | 24 | 0.47 | 2400 | 139 | 81.8 | 45 | 0.181 | 44 | ② |
| CFD60250B12M | 307 | 259 | 245 | 12 | 1.20 | 2200 | 169 | 99.5 | 41 | 0.165 | 44 | ① |
| CFD60250B24M | | | | 24 | 0.55 | 2200 | 169 | 99.5 | 41 | 0.165 | 44 | ① |
| CFD60300B12M | 368 | 321 | 306 | 12 | 1.35 | 2100 | 192 | 113.0 | 39 | 0.157 | 45 | ② |
| CFD60300B24M | | | | 24 | 0.63 | 2100 | 192 | 113.0 | 39 | 0.157 | 45 | ② |
| CFD60360B12M | 430 | 383 | 368 | 12 | 1.45 | 2000 | 212 | 124.8 | 37 | 0.150 | 46 | ① |
| CFD60360B24M | | | | 24 | 0.67 | 2000 | 212 | 124.8 | 37 | 0.150 | 46 | ① |
| CFD60420B12M | 492 | 444 | 429 | 12 | 1.53 | 1900 | 254 | 149.5 | 33 | 0.134 | 47 | ② |
| CFD60420B24M | | | | 24 | 0.73 | 1900 | 254 | 149.5 | 33 | 0.134 | 47 | ② |

● P-Q Curves / P-Q 曲線

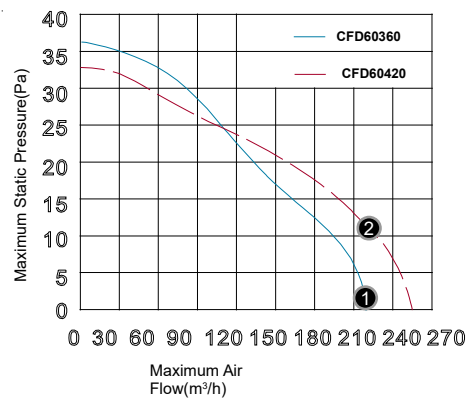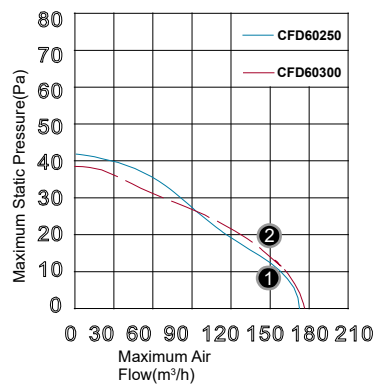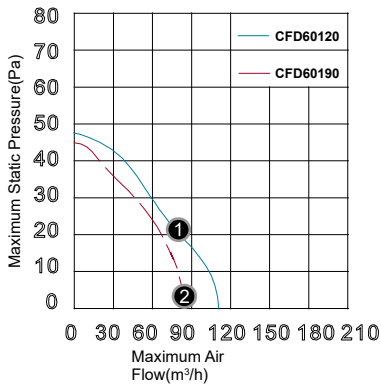

● Drawing

